

submittal

Job _____
 Location _____
 Submitted to _____
 Submittal Prepared by _____
 Approve Date _____
 Date _____

Fire Damper Series 77 Type C

UL Classified - 1½ Hour Rating, *Dynamic*
 For use in installations rated less than 3 hours

Standard Profile (4¼") 22 Ga.
 1 piece rollformed frame

Type C Damper
 Blades and frame out of air-stream, 100% free area





Available for vertical and horizontal installations

For installation in systems where fans remain running during fire and smoke control

Standard fusible link - 165°F
 (or w/optional 212°F)

Available in stainless steel

Available in single-section sizes from 4" to 20" Ø
 Oval and rectangular collars from 4" x 4" to 22" x 20"

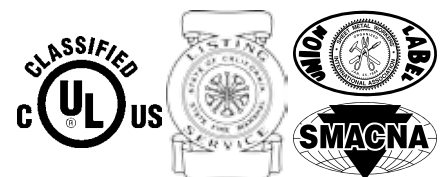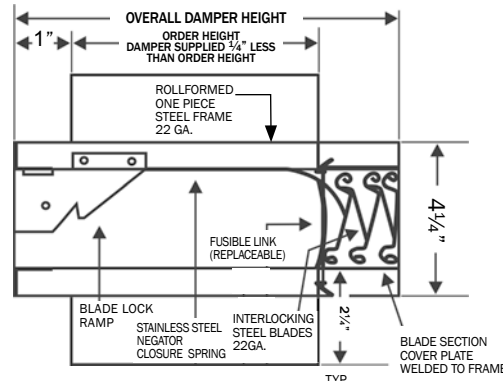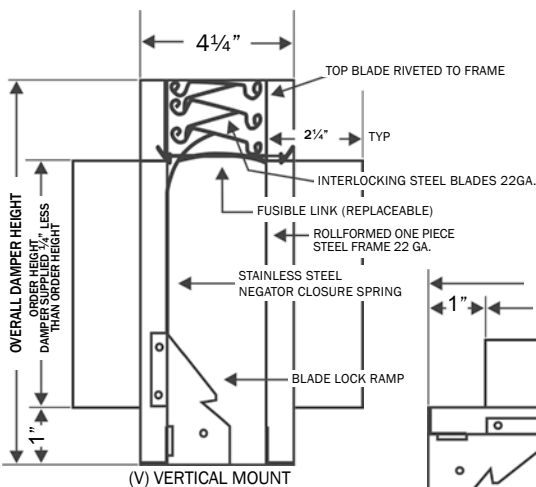

This product meets the requirements for fire dampers established by:

UL Standards 555
NFPA Standard 90A
ICC Building Codes

Qty.	Mount		Damper Size		Fusible Link Temp (165° F) std.	Factory Sleeve Option			
	(V) vertical (H) horizontal	W	H	Dimensions		Gauge	Material		
				L				K	

Part Number Format

7 7 C H 0 1 8 0 0 0 G



submittal



AireTechnologies, Inc.
a DMI company

AireTechnologies, Inc.
1502 Industrial Drive
E. Monongahela, PA 15063

phone: 866.421.AIRE
fax 724.310.1262

www.airetechnologies.com