



**Aire Technologies, Inc**  
a DMI company

Aire Technologies, Inc.  
1502 Industrial Drive  
E. Monongahela, PA 15063

phone: 866.421.AIRE  
fax 724.310.1262

www.airetechnologies.com

# submittal

Job \_\_\_\_\_  
 Location \_\_\_\_\_  
 Submitted to \_\_\_\_\_  
 Submittal Prepared by \_\_\_\_\_  
 Approve Date \_\_\_\_\_  
 Date \_\_\_\_\_

## Fire Damper Series 99 Type C

UL Classified - **3 Hour Rating, Dynamic**  
For use in installations rated 3 hours or greater

Standard Profile (4¼") 22 Ga.  
1 piece rollformed frame

Type C Damper  
Blades and frame out of air-stream, 100% free area

Available for vertical installation **ONLY**

For installation in systems where fans remain running during fire and smoke control




Standard fusible link - 165°F  
(or w/optional 212°F)

Available in stainless steel

Available in single-section sizes from 4" to 20" Ø  
Oval and rectangular collars from 4" x 4" to 22" x 20"



S  
C  
E  
P  
S

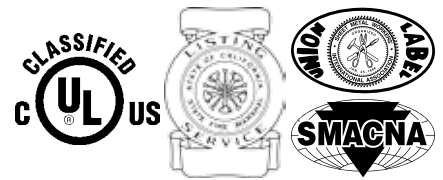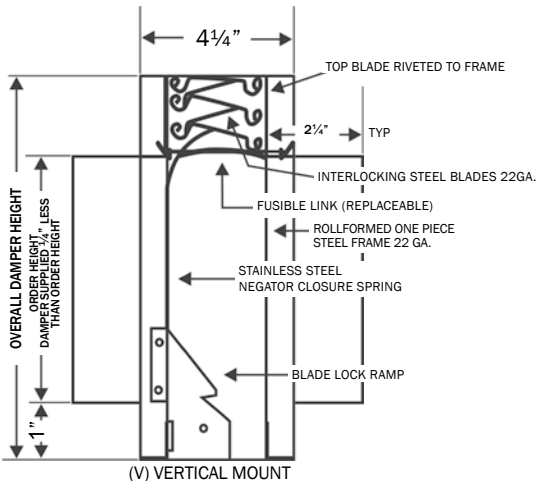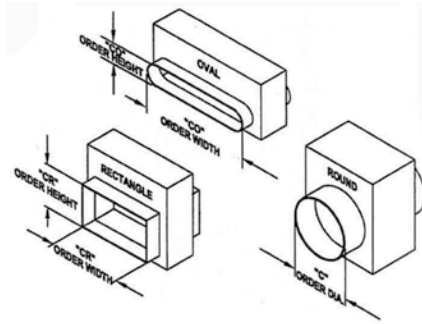


This product meets the requirements for fire dampers established by:

**UL Standards 555**  
**NFPA Standard 90A**  
**ICC Building Codes**

Qty.	Mount		Damper Size		Fusible Link Temp (165° F) std.	Factory Sleeve Option			
	(V) vertical (H) horizontal	W	H	Dimensions		Gauge	Material		
				L				K	

## Part Number Format

9 9 C V 0 1 8 0 0 0 G

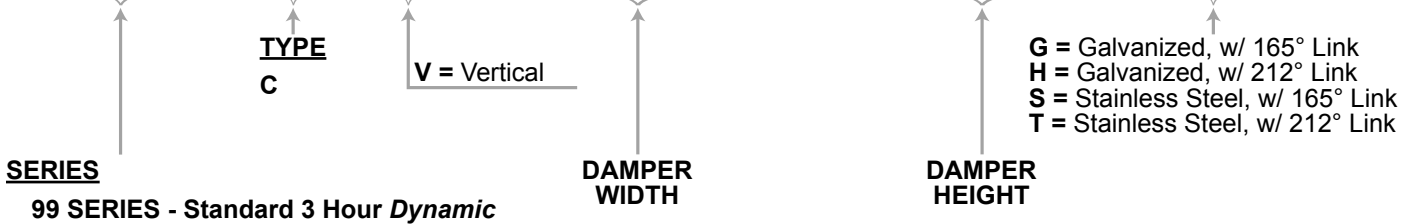

submittal



**AireTechnologies, Inc.**  
a DMI company

AireTechnologies, Inc.  
1502 Industrial Drive  
E. Monongahela, PA 15063

phone: 866.421.AIRE  
fax 724.310.1262

www.airetechnologies.com