## ComfortBreeze™ CB300 and CB300S


By-Pass Evaporative Humidifier



## PRODUCT DATA SHEET





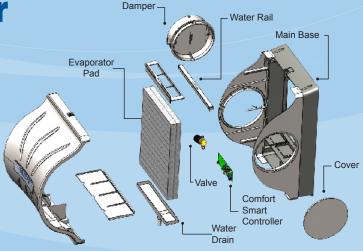

#### **Overview:**

As warm air passes across the moist humidifier pad, water is evaporated into the air stream. This raises the relative humidity of the air and contributes to the overall indoor air quality. Controlled humidity helps alleviate respiratory ailments as well as protect home furnishings and woodwork from the damages associated with dry air. ComfortBreeze™ humidifiers consume minimal electricity and are available with optional patent-pending, H₂OSmart™ saving technology to minimize water consumption and maximize output capacity. The H₂OSmart controls are equipped with fault annunciation and a service indicator to assist in troubleshooting any problems that may occur. When used with warm air furnaces, ComfortBreeze™ CB300S humidifiers deliver a peak capacity of 18 gallons per day.

#### **Features:**

- H₂OSmart<sup>™</sup> technology the smart controls automatically adjust to compensate for variations in temperature, airflow, and water pressure allowing the CB300S to provide maximum performance and water savings regardless of system conditions.
- Environmentally Friendly ComfortBreeze<sup>™</sup> humidifiers consume less than 10 watts of electricity and H<sub>2</sub>OSmart Technology translates into greater than 85% water savings versus conventional competing units.
- Versatile Installation By-Pass models include a summer/ winter shut-off damper and can deliver a peak capacity of 18 gallons per day.
- Push-To-Lock Fittings Water connections provide quick and easy installation and worry-free operation.
- Fault Annunciation The CB300S provides LED indication of fault codes and when evaporative pad replacement is necessary.
- Independent Operation The CB300S can be installed so that a "call for heat" is not required for the unit to deliver humidification. H<sub>2</sub>OSmart equipped models feature a relay that can power the HVAC blower.

#### **Operational Benefits:**

- H<sub>2</sub>OSmart technology maximizes humidification capacity while conserving water across all temperature conditions.
- Increasing a home's relative humidity can make it feel comfortable at a lower temperature. (68°F can feel equivalent to a dry 73°F)
- Lower thermostat settings can deliver substantial savings on monthly energy bills. Every degree of setback represents about a 3% savings on heating costs.
- Save on energy costs while improving comfort.
- No need to plumb to hot water lines as is recommended for other evaporative humidifiers to "help" improve their performance. The patent pending H<sub>2</sub>OSmart technology automatically maximizes evaporative performance without the added cost of using hot water.

#### **Warranty:**

5-Year
Limited
Warranty






# ComfortBreeze™ CB300 and CB300S

By-Pass Evaporative Humidifier

## PRODUCT DATA SHEET


## ComfortBreeze™ CB300 and CB300S

Model	CB300S with H₂OSmart™ Technology	CB300
Part No.	265686-001	265686-002
Type of Unit	By-Pass Evaporative	By-Pass Evaporative
Peak Capacity (GPD)*	18 Gallons per Day	18 Gallons per Day
Humidistat Type	Electronic	Mechanical
H₂OSmart™ Technology	Yes	No
Capacity Reduction	Yes	No
Water Supply	20-100 PSI	20-100 PSI
Voltage (Amps)	24VAC (0.25A)	24VAC (0.25A)
Unit Dimensions	14.13"W x 10.00" D x 19.00" H	14.13"W x 10.00" D x 19.00" H
Water Connection	1/4" OD Tubing	1/4" OD Tubing
Overflow Connection	1/2" ID Tubing	1/2" ID Tubing
Ducted Opening	9.75"W x 13.00"H	9.75"W x 13.00"H
By-Pass Duct Size	6.00" Round	6.00" Round
Shipping Weight	11.25 Lbs.	11.25 Lbs.
Operating Weight	8.5 Lbs.	8.5 Lbs.



Upflow **Bottom** Return

## **Optimum Humidity Zone:**

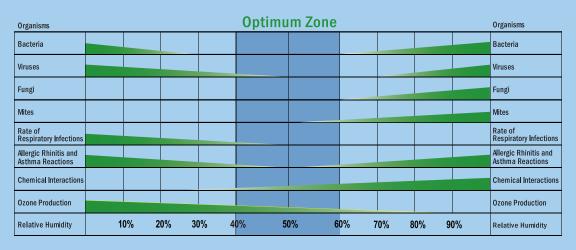



Horizontal Flow



Upflow Side Return

Indoor Air Quality Since 1947.

ISO 9001:2008 Certified.

**Industry Memberships:** 







**Proudly Designed,** Engineered, and Manufactured in the USA.\*



\*Manufactured with domestic and foreign components.

To help serve you better, please contact us at:

800-884-0002 (tel) 800-458-2379 (fax) **TRION®** 101 McNeill Road Sanford, NC 27330 www.trioniaq.com customerservice@trioniaq.com

TRION® is a registered trademark of Air System Components, Inc. Air System Components, Inc. is a subsidiary of Johnson Controls Inc. All product specifications reflect available information at the printing of this brochure. TRION® reserves the right to revise or modify products and/or specifications without notice. © 2015 TRION®

<sup>\*</sup> Peak capacity as tested at 140°F air temperature. Nominal capacity at 120°F is 18 GPD.