

# Submittal

Job \_\_\_\_\_  
 Location \_\_\_\_\_  
 Submitted to \_\_\_\_\_  
 Submittal Prepared by \_\_\_\_\_  
 Approve Date \_\_\_\_\_  
 Date \_\_\_\_\_

## Fire Damper Series 75 Type C

S  
C  
E  
P  
S

UL Classified - 1½ Hour Rating, Static  
 For use in installations rated less than 3 hours

Standard Profile (4¼") 22 Ga  
 1 piece rollformed frame

Type C Damper  
 Blades and frame out of air-stream, 100% free area

Available for vertical and horizontal installations






Available w/round, oval or rectangular collar

Standard fusible link - 165° F (optional 212° F)

Available in stainless steel

Available in single-section sizes to 60" x 60"  
 Duct sizes from 4" to 53" Ø vertical, 4" to 38" Ø horizontal  
 Oval and rectangular collars from  
 4" x 4" to 58" x 52" vertical  
 4" x 4" to 38" x 52" horizontal

Optional 22 Ga Sleeve available:  
 8", 12", 17", 20", or 24" lengths (12" is standard)

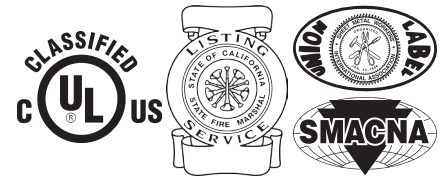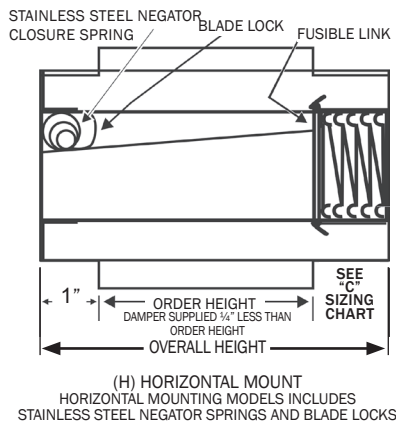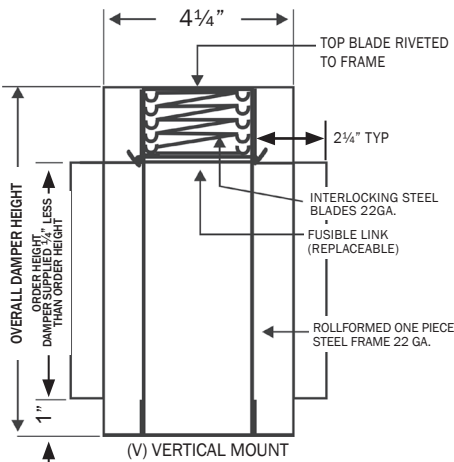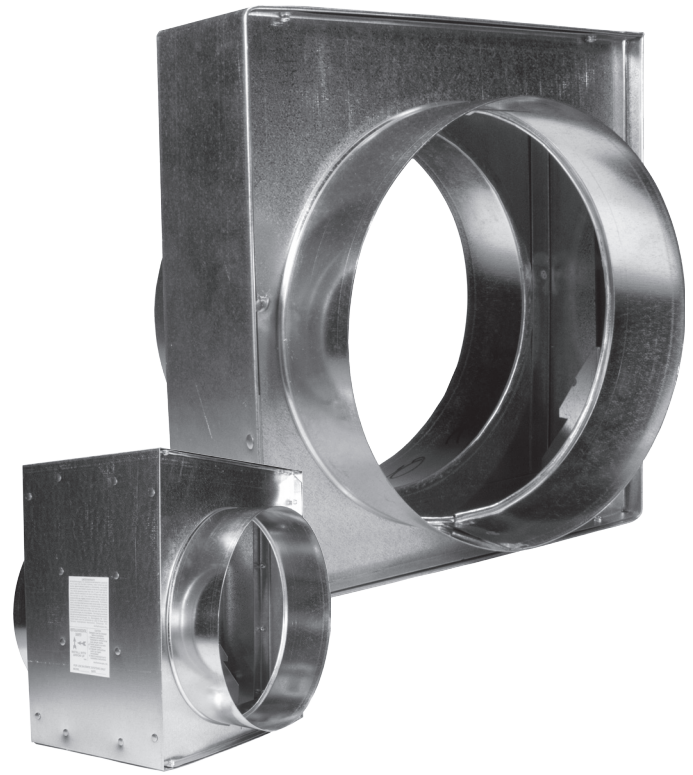


This product meets the requirements for fire dampers established by:

**UL Standards 555**  
**NFPA Standard 90A**  
**ICC Building Codes**

Qty.	Mount	Damper Size		Fusible Link Temp (165°F) std.	Factory Sleeve Length
	(V) vertical (H) horizontal	W	H		

## Part Number Format

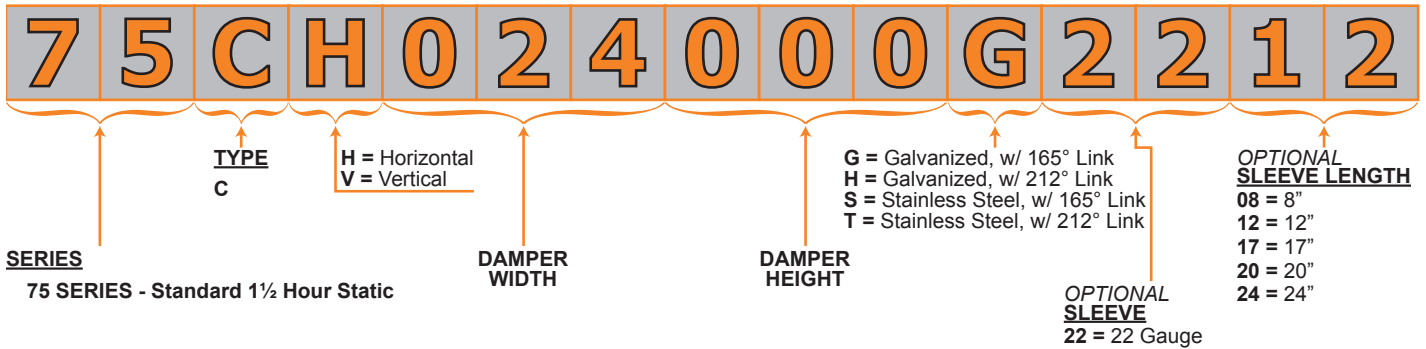

# Submittal



**AireTechnologies, Inc.**  
a DMI company

AireTechnologies, Inc.  
1502 Industrial Drive  
E. Monongahela, PA 15063

phone: 866.421.AIRE  
fax 724.310.1262

[www.airetechnologies.com](http://www.airetechnologies.com)