

# COMPLETE PACKAGE WITH NOTHING ELSE TO BUY FOR MOST INSTALLATIONS


## FEATURES:

- High 21.2 gallon output capacity per day at an average plenum temperature of 140 degrees.
- Powerful 3-watt motor, to silently rotate the drum.
- Durable corrosion-resistant stainless steel cabinet.
- Evaporative drum of high quality one-piece polyurethane material — replaceable in minutes.
- Adjustable float to keep water level at proper level.
- 24-volt system for easy installation with a minimum of electrical expense.
- Adjustable humidistat to control the humidity throughout the total home.
- Complete humidification system — no further accessories required for most installations.




1. ALL STAINLESS HOUSING & COVER.
2. FLEXIBLE DUCT.
3. 24-VOLT TRANSFORMER.
4. 24-VOLT MOTOR.
5. WATER SUPPLY LINE WITH SADDLE VALVE.
6. FLEXIBLE DUCT MOUNTING COLLARS.
7. ADJUSTABLE HUMIDISTAT.

## TYPICAL INSTALLATIONS

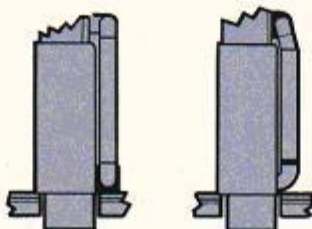

Hi-boy furnace with bottom return air intake or counterflow with warm air plenum beneath floor level.




Hi-boy furnace unit on return air.



Lo-boy furnace unit on return air.



Horizontal furnace.

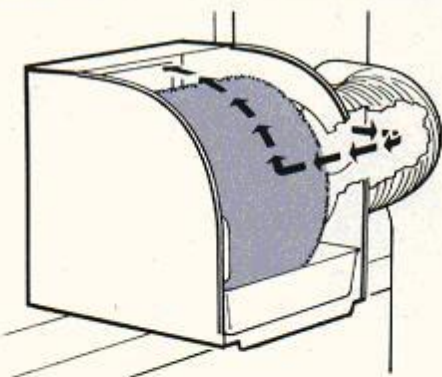

The FH-212 can be mounted on either the warm air plenum or the return air plenum. It can be mounted with air flow entering right or left by merely changing flexible tube brackets. We recommend the humidifier be installed on return air plenum for highest efficiency.

	FH-212 Series
Effective Capacities Based on 800 FPM air velocity at 140°F Plenum Temperature	21.2 Gal/Day 3200 Sq. Ft.
Water Supply	1/4" O.D. With Saddle Valve
Evaporator Pad	High Capacity Foam
Shipping Weight	16 LBS.
Plenum Opening	7 1/2" x 6 1/4"
Dimensions	

Distributed By



9790 Midwest Avenue, Cleveland, Ohio 44125-2497 (216) 587-6801